

Guide to Integrate ADSelfService Plus with Outlook Web App



Contents

Document Summary	1
ADSelfService Plus Overview	1
ADSelfService Plus Integration with Outlook Web App	1
Steps Involved	2
Step 1: Locate the OWA logon form (logon.aspx file)	2
Step 2: Configure the logon form to include Reset Password/Unlock Account link	3
For OWA 2016	3
For OWA 2013	8
For OWA 2010 and Older	11

Document Summary

This document will guide you through the steps involved in integrating ADSelfService Plus with Outlook Web App (OWA). The document has been separated into three sections. The first section will give you an overview of ADSelfService Plus and its features, while the second briefly describes about its integration with OWA. The third section gives you a detailed yet simple account of the steps involved in integrating ADSelfService Plus with OWA.

This document is written with the assumption that the reader has a basic knowledge of OWA and HTML editing.

ADSelfService Plus Overview

ManageEngine ADSelfService Plus, an integrated Active Directory self-service password management and single sign-on solution, helps reduce password reset tickets and spares end users the frustration caused by computer downtime. It offers,

- ✓ [Self-service password reset and account unlock](#)
- ✓ [Password and account expiration notifier](#)
- ✓ [Password policy enforcer](#)
- ✓ [Enterprise single sign-on and password synchronizer](#)
- ✓ [Windows logon two-factor authentication](#)
- ✓ [Directory self-update and employee search](#)

These features, designed to strike a balance between ensuring network security and ease-of-access, warrants improved ROI, and a productive IT workforce.

ADSelfService Plus Integration with Outlook Web App


Integrating ADSelfService Plus with Outlook Web App will place a Reset Password/Unlock Account link in the login page of OWA. When users forget their passwords and need to access their Exchange mailboxes, they can simply reset their passwords using ADSelfService Plus from OWA login page itself.

Steps Involved


To integrate ADSelfService Plus with Outlook Web App, you need to edit the Outlook Web App logon form to include the Reset Password/Unlock Account link. Please follow the steps given below:

Step 1: Locate the OWA logon form (logon.aspx file)

- 1) Open the Internet Information Services (IIS) Manager (Start > Administrative Tools > Internet Information Services (IIS) Manager).
- 2) In the left pane of the IIS manager console, expand **Sites > Default Web Site > OWA**.
- 3) Right-click **auth** folder and select **Explore**.

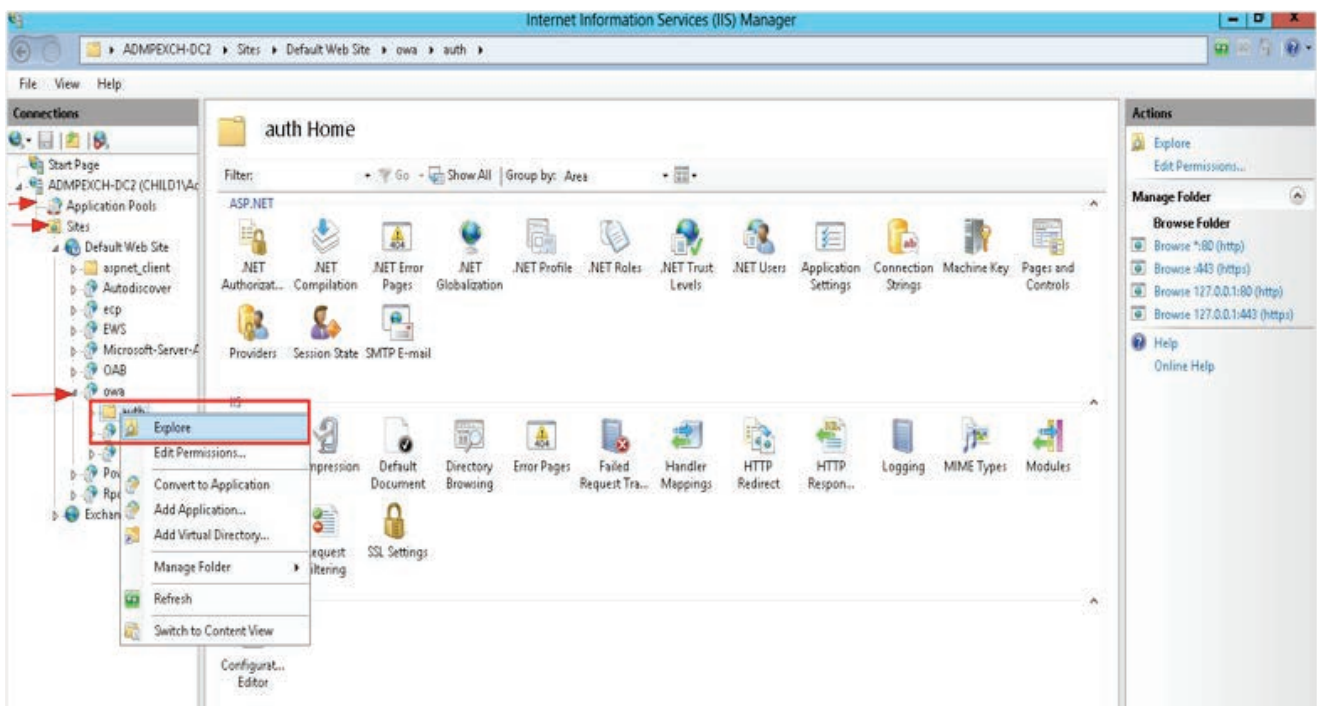

4) This will open the auth folder window where you can find the OWA logon form (**logon.aspx** file).

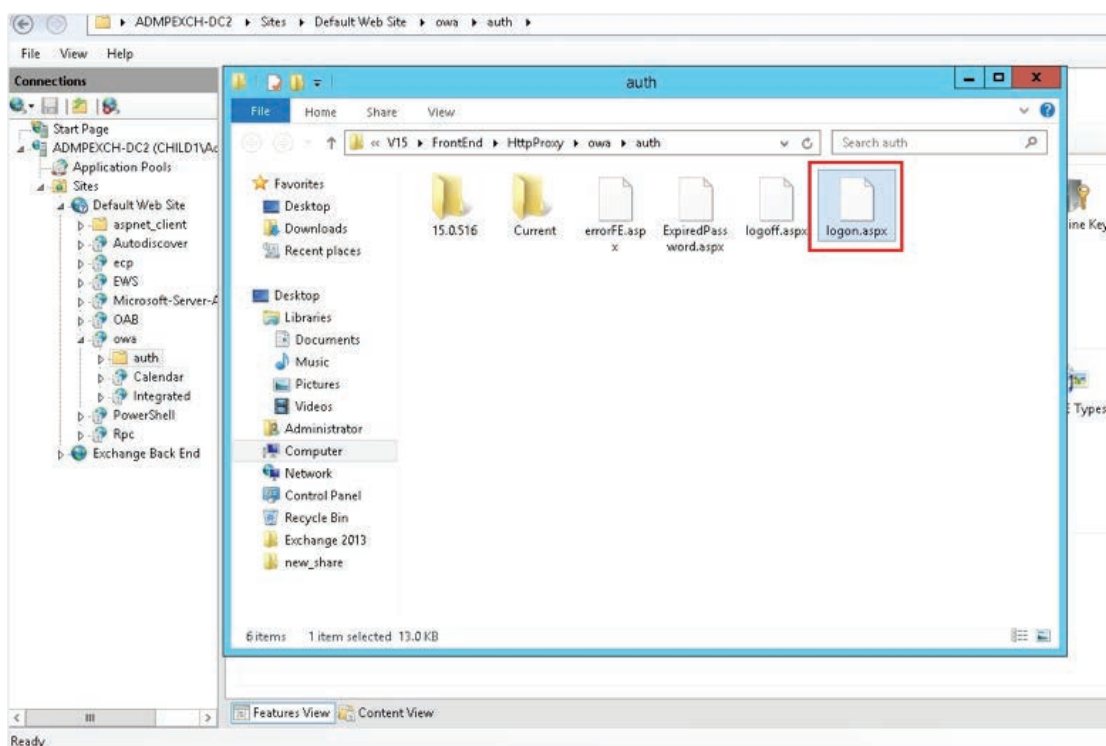

Step 2: Configure the logon form to include Reset Password/Unlock Account link

Note: Take a backup of logon.aspx file before proceeding with the steps given below.

For OWA 2016 (click [here](#) for OWA 2013 and [here](#) for OWA 2010)

- 1) Open the logon.aspx file in an HTML editor of your choice.
- 2) Locate the following block of code:

```
<div class="signInInputLabel" id="userNameLabel"
aria-hidden="true"><%=UserNameLabel%></div>
<div><input id="username" name="username" class="signInInputText"
role="textbox"
aria-labelledby="userNameLabel"/></div>
<div class="signInInputLabel" id="passwordLabel"
```

```

aria-hidden="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PasswordColon)
%></div>

<div><input id="password" onfocus="g_ffCs=0" name="password" value=""
type="password"
class="signInInputText" aria-labelledby="passwordLabel"/></div>
<div><input id="passwordText" onfocus="g_ffCs=0" name="passwordText"
value=""
style="display: none;" class="signInInputText" aria-labelledby="pass
wordLabel"/></div>
<div class="showPasswordCheck signInCheckBoxText">
<input type="checkbox" id="showPasswordCheck" class="chk" onclick="
showPasswordClick()"
/>
<span><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.ShowPass
word)%></span>
</div>
<% if (ShowPublicPrivateSelection) { %>
<div class="signInCheckBoxText">
<input id="chkPrvt" onclick="clkSec()" name="trusted" value="4"
type="checkbox" class="chk"
checked role="checkbox" aria-labelledby="privateLabel"/>
<span id="privateLabel"
aria-hidden="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.ThisIsAPrivateComputer
)%></span>
<%= (IsRtl ? "&#x200F;" : "&#x200E;") +
LocalizedStrings.GetHtmlEncoded(Strings.IDs.OpenParentheses)%>

```

```

<a href="#" class="signInCheckBoxLink" id="lnkShwSec" onclick="clkSec
Exp('lnkShwSec')"
onkeydown="kdSecExp('lnkShwSec')"
role="link"><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.
ShowExplanation)%></a>
<a href="#" class="signInCheckBoxLink" id="lnkHdSec"
onclick="clkSecExp('lnkHdSec')"onkeydown="kdSecExp('lnkHdSec')"
style="display:none"
role="link">
<%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.HideExplanation)%>
</a>
<%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.CloseParentheses) +
(IsRtl ? "&#x200F;" :
"&#x200E;")%>
</div>
<div id="prvtExp" class="signInExpl" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateExplanation)%></div>
<div id="prvtWrn" class="signInWarning" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateWarning)%></div>
<% } %>

```

3) Replace the above block of code with the code given below:

```

<div class="signInInputLabel" id="userNameLabel"
aria-hidden="true"><%=UserNameLabel%></div>
<div><input id="username" name="username" class="signInInputText"
role="textbox"
aria-labelledby="userNameLabel"/></div>
<div class="signInInputLabel" id="passwordLabel"

```

```

aria-hidden="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PasswordColon)
%></div>

<div><input id="password" onfocus="g_fFcs=0" name="password" value=""
type="password"
class="signInInputText" aria-labelledby="passwordLabel"/></div>
<div><input id="passwordText" onfocus="g_fFcs=0" name="passwordText"
value=""
style="display: none;" class="signInInputText" aria-labelledby="pass
wordLabel"/></div>
<div class="showPasswordCheck signInCheckBoxText">
<input type="checkbox" id="showPasswordCheck" class="chk" onclick="
showPasswordClick()"
/>
<span><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.ShowPass
word)%></span>
</div>
<!--ADSSP-->
<div class="signInInputLabel" style="font-size:14px;"><a
style="text-decoration:none;color:#0072c6;" target="_blank"
href="[URL_TO_YOUR_SERVER]">Forgot Password?</a></div>
<!--END ADSSP-->
<% if (ShowPublicPrivateSelection) { %>
<div class="signInCheckBoxText">
<input id="chkPrvt" onclick="clkSec()" name="trusted" value="4"
type="checkbox" class="chk"
checked role="checkbox" aria-labelledby="privateLabel"/>
<span id="privateLabel"

```



```

aria-hidden="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.ThisIsAPrivateComputer
)%></span>
<%= (IsRtl ? "&#x200F;" : "&#x200E;") +
LocalizedStrings.GetHtmlEncoded(Strings.IDs.OpenParentheses)%>
<a href="#" class="signInCheckBoxLink" id="lnkShwSec" onclick="clkSec
Exp('lnkShwSec')"
onkeydown="kdSecExp('lnkShwSec')"
role="link"><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.
ShowExplanation)%></a>
<a href="#" class="signInCheckBoxLink" id="lnkHdSec"
onclick="clkSecExp('lnkHdSec')"onkeydown="kdSecExp('lnkHdSec')"
style="display:none"
role="link">
<%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.HideExplanation)%>
</a>
<%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.CloseParentheses) +
(IsRtl ? "&#x200F;" :
"&#x200E;")%>
</div>
<div id="prvtExp" class="signInExpl" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateExplanation)%></div>
<div id="prvtWrn" class="signInWarning" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateWarning)%></div>
<% } %>


```

Replace [URL_TO_YOUR_SERVER] with ADSelfService Plus server name.

For example: `<div class="signInInputLabel" style="font-size:14px;">Forgot Password?</div>`

4) Save and then close the file.

Now, open your Outlook Web App page from a browser and verify whether the 'Reset Password' link works properly.

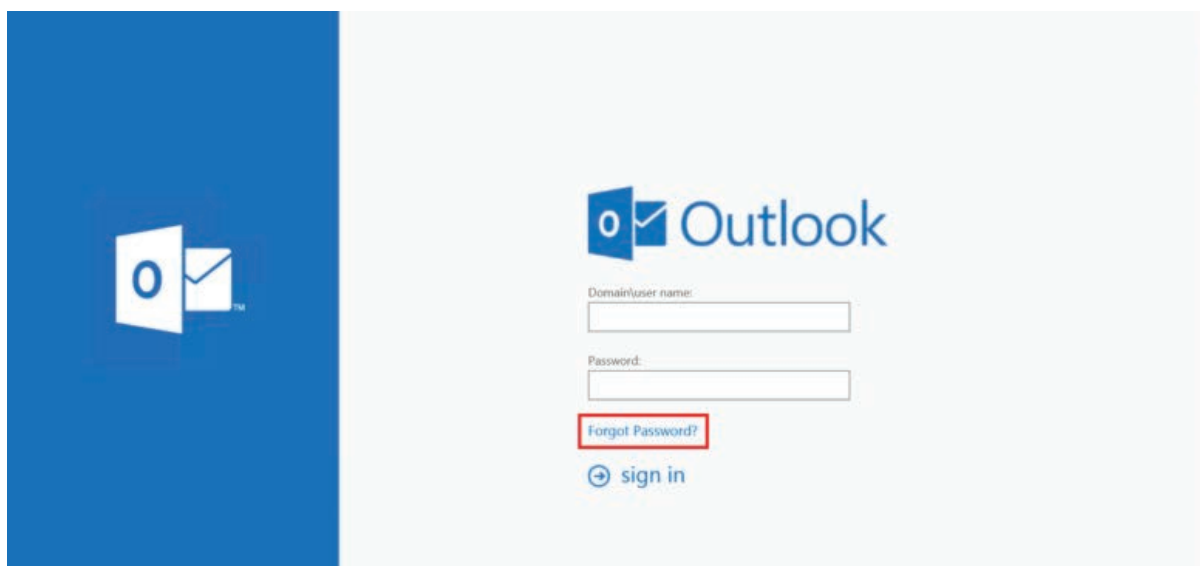

For OWA 2013

- 1) Open the **logon.aspx** file in an HTML editor of your choice.
- 2) Locate the following block of code:

```
<div class="signInInputLabel" id="userNameLabel" aria-hidden="true"><%=UserNameLabel%></div>
<div><input id="username" name="username" class="signInInputText" role="textbox" aria-labelledby="userNameLabel"/></div>
<div class="signInInputLabel" id="passwordLabel" aria-hidden="true"><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.PasswordColon) %></div>
```

```

</div>
<div id="prvtExp" class="signInExpl" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateExplanation)%></div>
<div id="prvtWrn" class="signInWarning" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateWarning)%></div>
<% } %>

```

3) Replace the above section of codes with the code given below:

```

<div class="signInInputLabel" id="userNameLabel" aria-hid
den="true"><%=UserNameLabel%></div>
<div><input id="username" name="username" class="signInInputText"
role="textbox" aria-labelledby="userNameLabel"/></div>
<div class="signInInputLabel" id="passwordLabel" aria-hid
den="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PasswordColon) %></div>
<div><input id="password" onfocus="g_ffCs=0" name="password" value=""
type="password" class="signInInputText" aria-labelledby="passwordLa
bel"/></div>
    <div class="showPasswordCheck checkBoxLabel"><input type="
checkbox" id="showPasswordCheck" class="chk" onclick="showPassword
Click()" /><%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.ShowPass
word)%></div>
<!--ADSSP-->

```

```

<div class="signInInputLabel" style="font-size:14px;"><a
style="text-decoration:none;color:#0072c6;" target="_blank"
href="[URL_TO_YOUR_SERVER]">Forgot Password?</a></div>
<!--END ADSSP-->
<% if (ShowPublicPrivateSelection) { %>
<div class="signInCheckBoxText">
    <input id="chkPrvt" onclick="clkSec()" name="trusted"
value="4" type="checkbox" class="chk" checked role="checkbox" aria-la
belledby="privateLabel"/>
    <span id="privateLabel" class="checkboxLabel" aria-hid
den="true"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.ThisIsAPrivateComputer)%></span>
    <%=(!Rtl ? "&#x200F;" : "&#x200E;") + LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.OpenParentheses)%>
    <a href="#" class="signInCheckBoxLink" id="lnkShwSec" onclick="clkSec
Exp('lnkShwSec')" role="link">
    <%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.ShowExplanation)%>
</a>
    <a href="#" class="signInCheckBoxLink" id="lnkHdSec" onclick="clkSec
Exp('lnkHdSec')" style="display:none" role="link">
    <%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.HideExplanation)%>
</a>
    <%=LocalizedStrings.GetHtmlEncoded(Strings.IDs.CloseParentheses) +
(!Rtl ? "&#x200F;" : "&#x200E;")%>
</div>
<div id="prvtExp" class="signInExpl" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateExplanation)%></div>

```


```
<div id="prvtWrn" class="signInWarning" style="display:none"
role="note"><%=LocalizedStrings.GetHtmlEncod
ed(Strings.IDs.PrivateWarning)%></div>
<% } %>
```

Replace [URL_TO_YOUR_SERVER] with ADSelfService Plus server name.

For example: `<div class="signInInputLabel" style="font-size:14px;">Forgot Password?</div>`

4) Save and then close the file.

Now, open your Outlook Web App page from a browser and verify whether the 'Reset Password' link works properly.

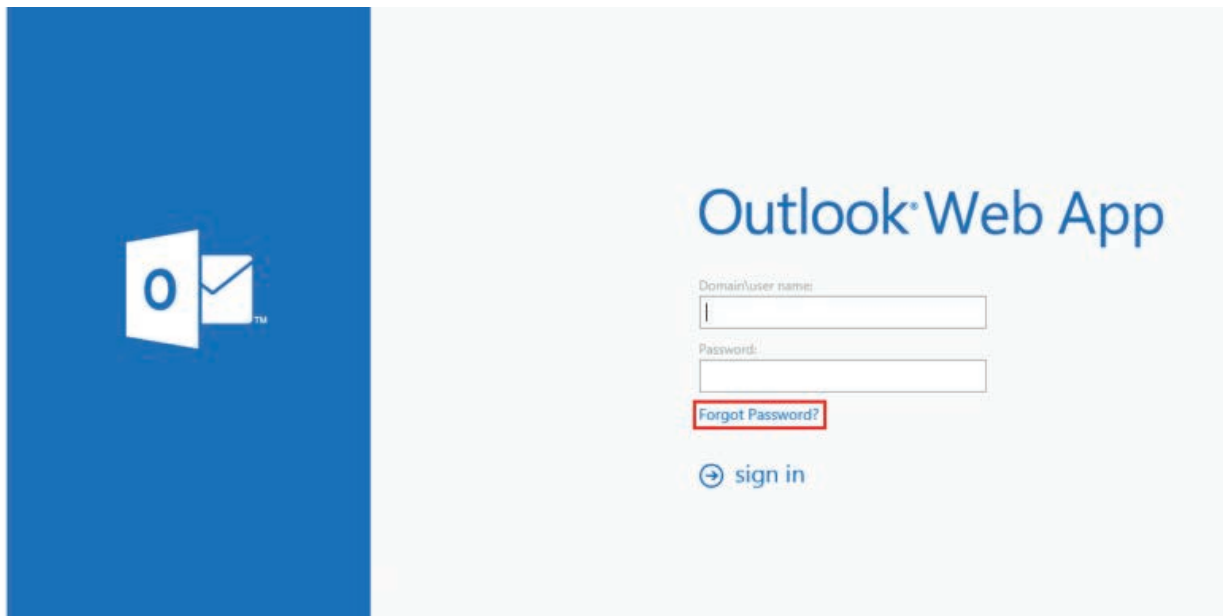

For OWA 2010 and Older

- 1) Open the **logon.aspx** file in an HTML editor of your choice
- 2) Locate the following block of code:

```

<table <%=tblStyle%>>
  <col class="nowrap">
  <col class="w100">
  <col>
  <tr>
    <td nowrap><label for="username"><%=UserNameLabel%></la
    bel></td>
    <td class="txtpad"><input id="username" name="username"
    type="text" class="txt"></td>
  </tr>
  <tr>
    <td nowrap><label for="password"><%=LocalizedStrings.GetHtm
    lEncoded(Strings.IDs.PasswordColon) %></label></td>
    <td class="txtpad"><input id="password" name="password"
    type="password" class="txt" onfocus="g_fCs=0"></td>
  </tr>
  <tr>
    <td colspan=2 align="right" class="txtpad">
    <% if (!IsDownLevelClient) { %>
    <input type="submit" class="btn" value="<%=Localized
    Strings.GetHtmlEncoded(Strings.IDs.LogOn) %>" onclick="clkLgn()"
    onmouseover="this.className='btnOnMseOvr'" onmouseout="
    this.className='btn'" onmousedown="this.className='btnOnMseDwn'">
    </input>
    <% } %>
    <% else { %>
    <input type="submit" class="btn" value="<%=Localized
    Strings.GetHtmlEncoded(Strings.IDs.LogOn) %>" onclick="clkLgn()">
    <% } %>
    <input name="isUtf8" type="hidden" value="1">
  </td>
  </tr>
</table>

```

3) Replace the above section of codes with the code given below:

```

<table <%=tblStyle%>>
  <col class="nowrap">

```

```

<col class="w100">
<col>
<tr>
  <td nowrap><label for="username"><%=UserNameLabel%></
label></td>
  <td class="txtpad"><input id="username" name="username"
type="text" class="txt"></td>
</tr>
<tr>
  <td nowrap><label for="password"><%=Localized
Strings.GetHtmlEncoded(Strings.IDs.PasswordColon) %></la
bel></td>
  <td class="txtpad"><input id="password" name="password"
type="password" class="txt" onfocus="g_fFcs=0"></td>
</tr>
  <!--ADSSP-->
  <tr>
    <td><a href=<%= "[URL_TO_YOUR_SERVER]" %> target="_-
blank">Forgot password?</a></td>
  </tr>
  <!--END ADSSP-->
<tr>
  <td colspan=2 align="right" class="txtpad">
    <% if (!IsDownLevelClient) { %>
    <input type="submit" class="btn" value="<%=Localized
Strings.GetHtmlEncoded(Strings.IDs.LogOn) %>" onclick="clk
Lgn()"
    onmouseover="this.className='btnOnMseOvr'" on
mouseout="this.className='btn'" onmousedown="this.
className='btnOnMseDwn'">
    </input>
    <% } %>
    <% else { %>
    <input type="submit" class="btn" value="<%=Localized
Strings.GetHtmlEncoded(Strings.IDs.LogOn) %>" onclick="clk
Lgn()">
    <% } %>
    <input name="isUtf8" type="hidden" value="1">
  </td>
</tr>
</table>


```

Replace [URL_TO_YOUR_SERVER] with ADSelfService Plus server name.

For example: : `<td><a href=<%= "https://xyz.adselfserviceplus.com"%>target="_blank">Forgot password?</td>`

4) Save and then close the file.

Now, open your Outlook Web App page from a browser and verify whether the 'Reset Password' link works properly.

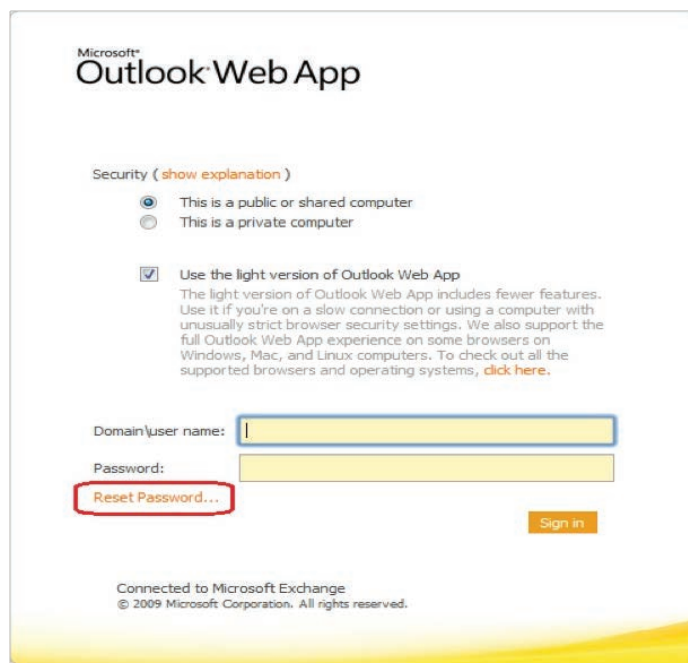

About ADSelfService Plus

ADSelfService Plus is an integrated self-service password management and single sign-on solution. It offers password self-service, password expiration reminders, a self-service directory updater, two-factor authentication for Windows logons, a multiplatform password synchronizer, and single sign-on for cloud applications. ADSelfService Plus' Android and iOS mobile apps as well as Windows, macOS, and Linux login agents facilitate self-service actions for end users anywhere, at any time.

\$ Get Quote

↓ Download